

NXBM-8P67

BUTLER MATRIX

8x8 Butler Matrix
0.6 to 7.125 GHz



sample image of Butler matrix attenuator

OVERVIEW

The **8x8 Butler Matrix** is a passive RF network designed to provide a set of predefined spatial beams for multi-antenna systems. The network distributes RF energy from a selected input port to multiple outputs with defined phase offsets, enabling repeatable beam formation without active control. The architecture supports bidirectional operation and is suitable for controlled spatial signal processing in test and measurement environments.

FEATURES

- ✚ Predefined fixed beam patterns
- ✚ Passive, bidirectional RF operation
- ✚ Controlled phase offsets across output ports
- ✚ Uniform signal distribution characteristics
- ✚ Broadband implementation for multi-standard testing
- ✚ Stable and repeatable RF performance
- ✚ SMA, 50-ohm RF interfaces


APPLICATIONS

- ✚ Multi-antenna and beamforming system evaluation
- ✚ MIMO and spatial channel testing
- ✚ Over-the-air (OTA) measurement setups
- ✚ Antenna and beam pattern characterization
- ✚ RF verification in laboratory and production environments

WAVENXT TECHNOLOGIES PRIVATE LIMITED

No 847, II floor, A Block, Sahakarnagar, Bangalore 560092, Ph no: 080 41643659,
email sales@wavenxt.com

FUNCTIONAL BLOCK DIAGRAM

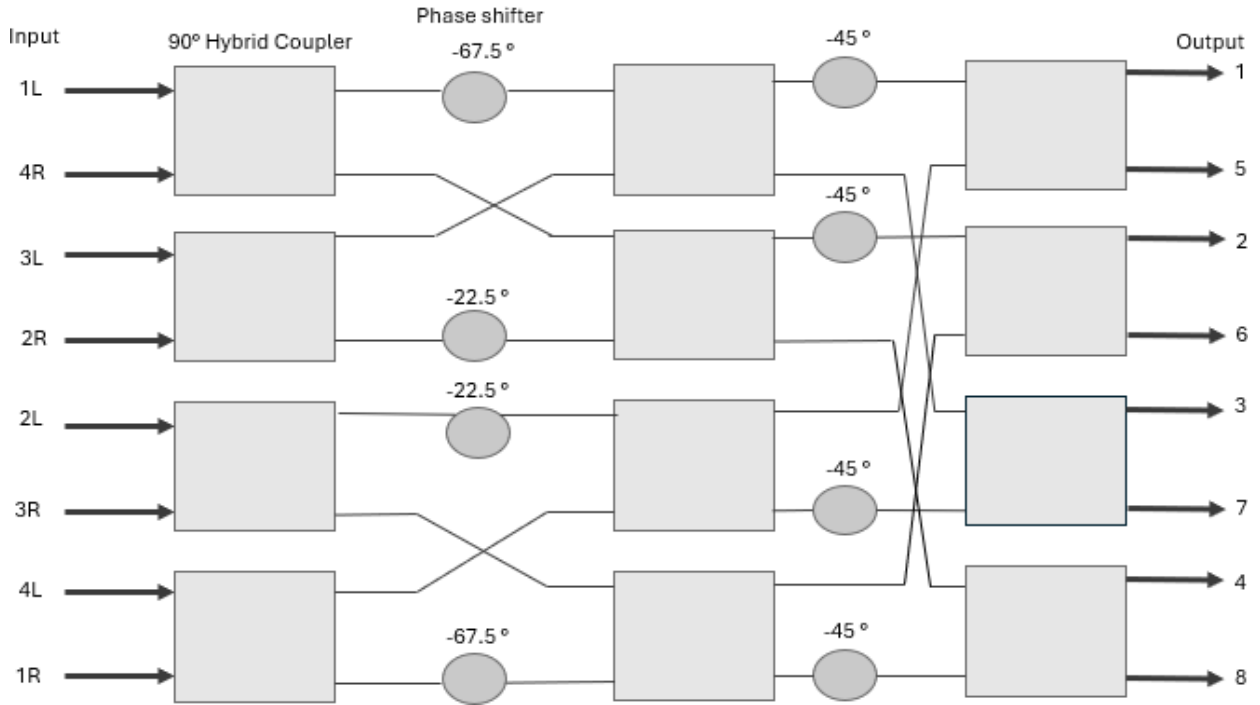

PHASE MAPPING TABLE

Input port	Expected phase values at output ports (in degrees)							
	1	2	3	4	5	6	7	8
1L	-112.5	-135	-157.5	-180	-202.5	-225	-247.5	-270
2L	-112.5	-180	-247.5	-315	-22.5	-90	-157.5	-225
3L	-135	-247.5	0	-112.5	-225	-337.5	-90	-202.5
4L	-180	-337.5	-135	-292.5	-90	-247.5	-45	-202.5
4R	-202.5	-45	-247.5	-90	-292.5	-135	-337.5	-180
3R	-202.5	-90	-337.5	-225	-112.5	0	-247.5	-135
2R	-225	-157.5	-90	-22.5	-315	-247.5	-180	-112.5
1R	-270	-247.5	-225	-202.5	-180	-157.5	-135	-112.5

KEY SPECIFICATIONS

Parameter		Min	Typ	Max
Frequency Range (GHz)		0.6		7.125
Impedance (Ω)			50	
Number of RF Ports	16 (8 beam input ports, 8 antenna output ports)			
Insertion loss (in dB)				11
VSWR			1.5	
Phase Balance (in degrees)	± 9			
Amplitude balance (in dB)	3			
Isolation between ports (in dB)	>20			
Maximum RF input power (in dBm)	30			
Temperature	5 °C to 40 °C			
RF connectors	SMA Female			
Form factor	Compact and rugged Fits lab racks and field systems easily			
Dimensions (approx. in mm)	130 x 110 x 10			

WAVENXT TECHNOLOGIES PRIVATE LIMITED

No 847, II floor, A Block, Sahakarnagar, Bangalore 560092, Ph no: 080 41643659,
email sales@wavenxt.com